


PERFORMA™

Vinylrock™

LOW VOC

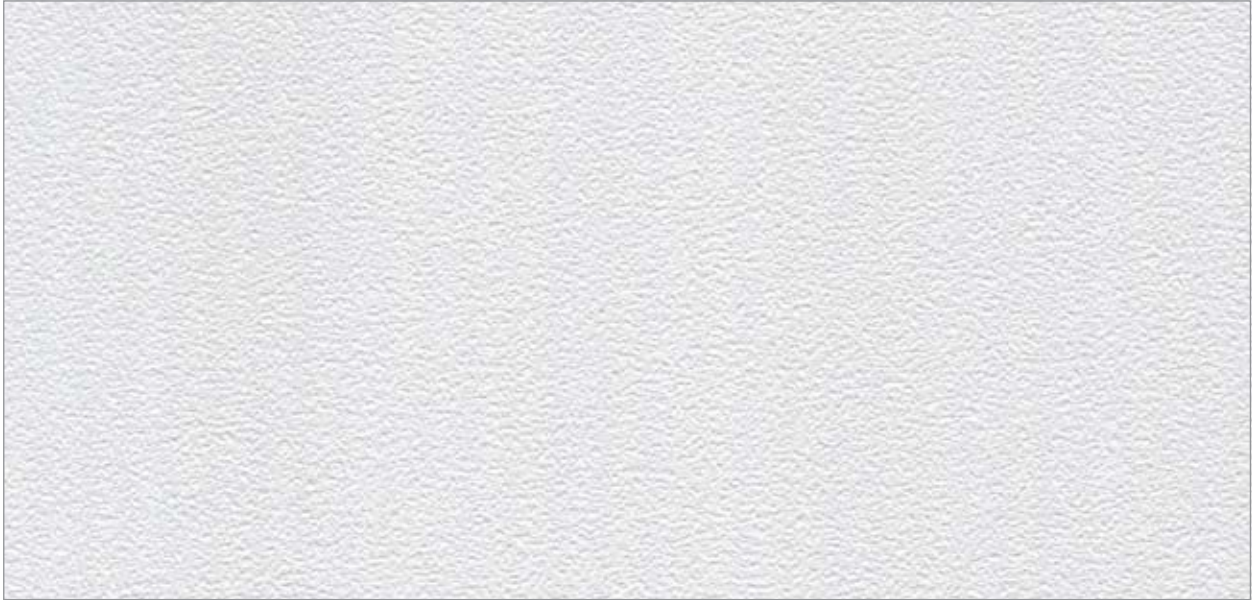

LEED®

- ✓ Optimize Energy Performance
- ✓ Building Reuse
- ✓ Regional Materials
- ✓ Daylight and Views
- ✓ IEQ: Low-Emitting

RECYCLED CONTENT

0% Pre-consumer | **0%** Post-consumer

RELATIVE INSTALLED COST: \$\$\$\$

FEATURES & BENEFITS

- Vinyl-faced, highly durable gypsum panel
- Appropriate for use in ceilings that require repeated cleaning, and suitable for cleaning with common disinfecting chemicals
- Satisfies USDA/FSIS guidelines for sanitary applications
- Exceeds FGI Guidelines for cleanability
- Approved for use in federally registered Canadian food establishments
- Suitable Clean Room component to ISO Class 5
- No added formaldehyde

APPLICATIONS

- Hospitals
- Restrooms
- Food Processing
- Loading Docks
- Commercial Kitchens











AVAILABLE EDGE DETAILS



Trim
15/16" Grid



ATTRIBUTES

ITEM NUMBER	DIMENSIONS (INCHES)	EDGE DETAIL	 NRC	 CAC	 SAG RESISTANT	 MOLD RESISTANT	 LR	 WASHABLE	 SCRATCH RESISTANT	 FIRE RATING	 EMISSIONS	 RECYCLED CONTENT
1142-CRF-1	24 x 24 x 1/2	Trim	—	38	Yes	—	0.78	Yes	—	Class A	Certified	0%
1140-CRF-1	24 x 48 x 1/2	Trim	—	40	Yes	—	0.78	Yes	—	Class A	Certified	0%

PHYSICAL DATA

MATERIAL

Gypsum

ASTM E1264 CLASSIFICATION

Type XX, Pattern G

FIRE PERFORMANCE

Per ASTM E1264: Class A, Flame Spread 25 or less
Per ASTM E84: Smoke Developed 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1., 2010.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment. Cleanable with sanitizing chemicals.

WARRANTY

10 year 104/90 Limited Warranty